



No More Wheel Benders

Bicyclists hate old-style “wheel bender” bike racks, the ones where you wedge your wheel between the bars and can’t use a U-lock. We hate them, too! That’s why we made the U-LOCKIT™ — a small, modular, affordable rack that actually does what bike racks are supposed to do: secure your bike with any lock. Perfect for smaller applications and short-term parking at schools, churches, and small businesses.

Patent pending

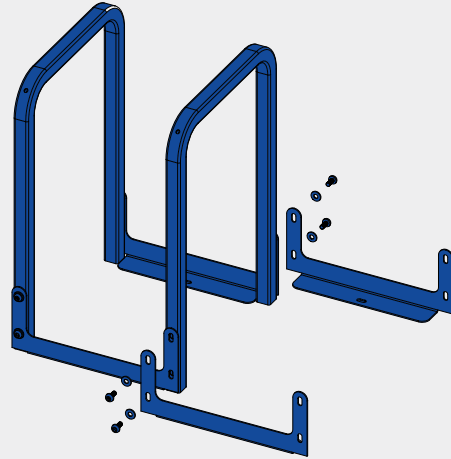
PRODUCT & PRICING INFO CONTACT

 **STREETSCAPES**
STREETSCAPES.BIZ

Info@streetscapefurniture.com ■ 303.398.7040

ADD ON AS NEEDED

Individual U-Lockit™ arms bolt together so you can order just the amount you need, and it's easy to add more later.



FINISH OPTIONS

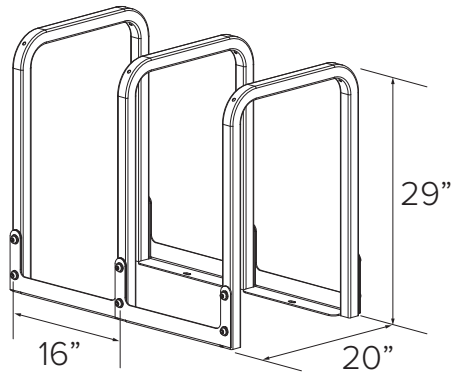
Galvanized



Powder Coat

White	Black	Light Gray RAL 7042	Deep Red RAL 3003	Yellow RAL 1023
CNH Bright Yellow	Orange RAL 2004	Blue RAL 5005	Sky Blue RAL 5015	Hunter Green RAL 6005
Light Green RAL 6018	Green RAL 6016	Sepia Brown RAL 8014	Bronze	Silver 9007
Dark Purple	Flat Black	Wine Red RAL 3005	Beige RAL 1001	Iron Gray 7011

Submittal Sheet

**CAPACITY**

2 Bikes per hoop
3 hoop minimum for stability

MATERIALS

Hoop: 1.5" 12g sq. tube
Connectors: 11g plate

FINISHES**Powder Coat**

Our powder coat finish assures a high level of adhesion and durability by following these steps:

1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

**Galvanized**

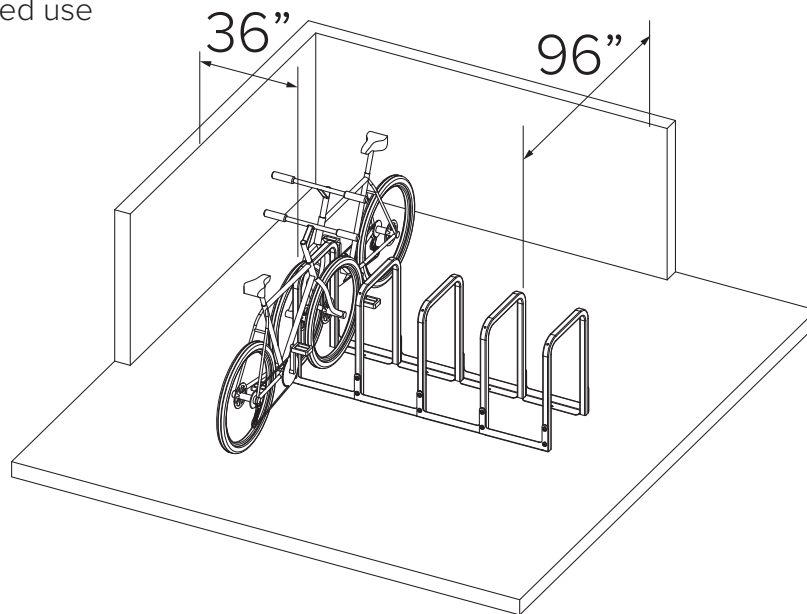
An after fabrication hot dipped galvanized finish is our standard option.

MOUNT OPTIONS**Surface**

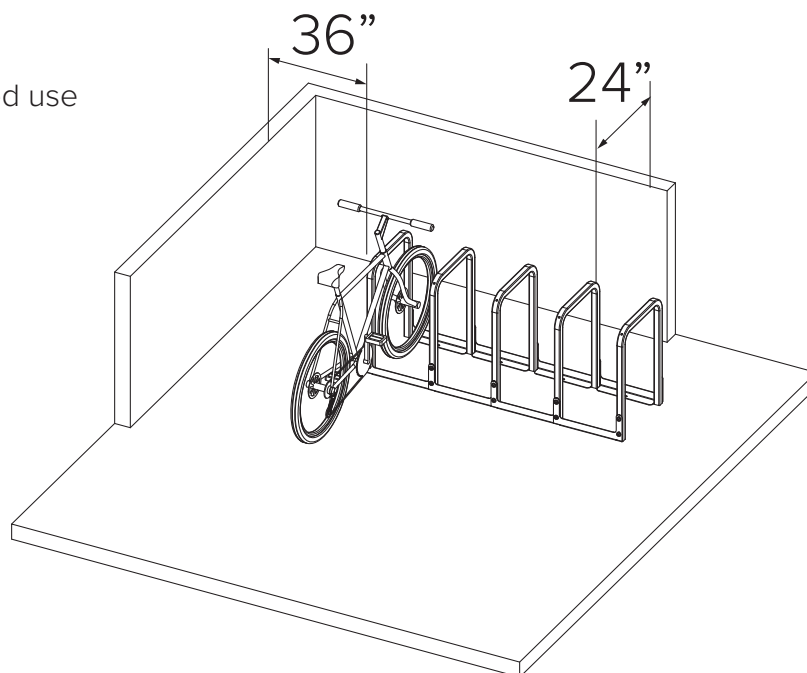
All connections and mounting parts have pre-threaded mounting holes (except the feet). No drilling or tapping required.

U-LOCKIT™ Setbacks

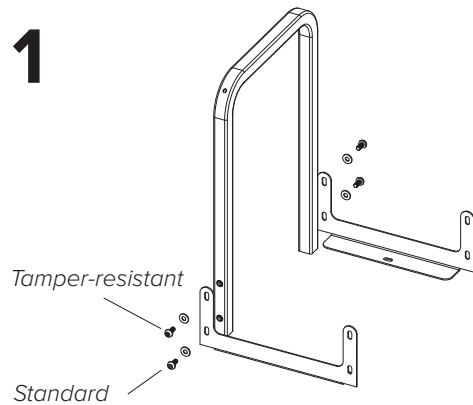
Double sided use



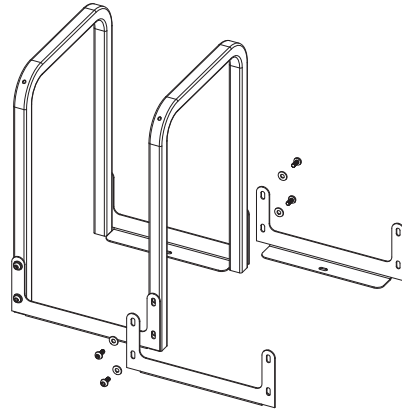
Single sided use



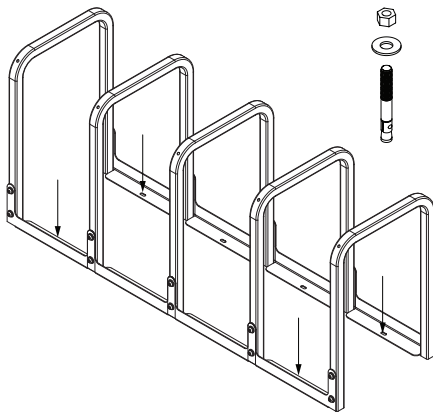
Installation Instructions

1

Place the rack in the desired location. Use a marker or pencil to outline the holes of the flange onto the base material.

2

Attach the next hoop and (2) plates with (2) 3/8" x 1" tamper-resistant bolts, (2) 3/8" x 1" bolts, and (4) washers. Continue attaching hoops and plates as needed.

3

When assembly is completed, position the assembly and anchor to the ground through the slotted holes in the plates on each end of the run of racks. For longer runs you may also need to add anchors to a middle section.