

# HELIX RACK



## Spiral Support

The Helix Rack is an attractive, double-sided, space efficient bike rack. For a stunning visual effect, several Helix Racks can be placed together to create the illusion of a continuous spiral. The curve and pitch of the Helix also makes it nearly impossible for thieves to cut with a pipe cutter.


PRODUCT & PRICING INFO CONTACT

 **STREETSCAPES**  
STREETSCAPES.BIZ

Info@streetscapefurniture.com ■ 303.398.7040



# HELIX RACK

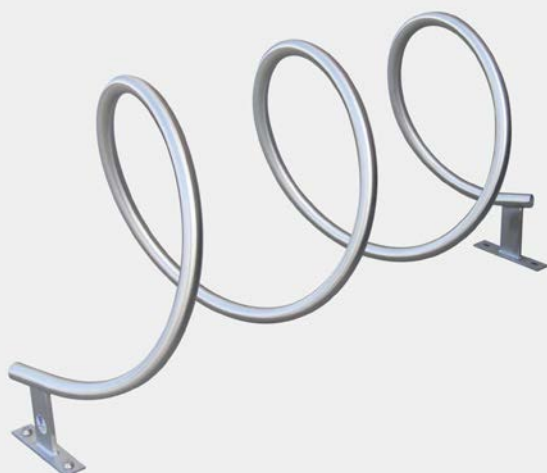

- Unique aesthetics
- Holds 6 bikes



## FINISH OPTIONS

Galvanized



Stainless




Powder Coat

White	Black	Light Gray RAL 7042	Deep Red RAL 3003	Yellow RAL 1023
CNH Bright Yellow	Orange RAL 2004	Blue RAL 5005	Sky Blue RAL 5015	Hunter Green RAL 6005
Light Green RAL 6018	Green RAL 6016	Sepia Brown RAL 8014	Bronze	Silver 9007
Dark Purple	Flat Black	Wine Red RAL 3005	Beige RAL 1001	Iron Gray 7011

# HELIX RACK

## Submittal Sheet

---

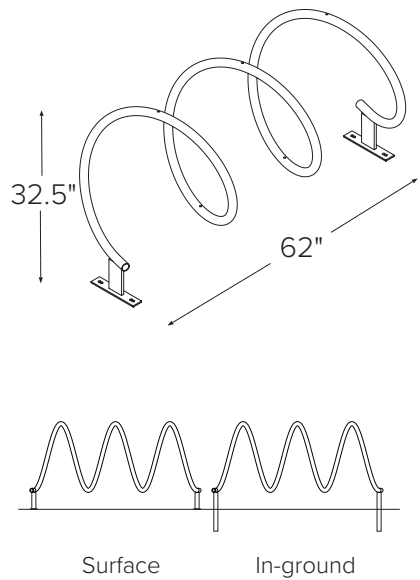

**CAPACITY** 6 Bikes

**MATERIALS** 1.25" Pipe (1.66" OD)

**FINISHES**

- ☐ **Galvanized**  
An after fabrication hot dipped galvanized finish is our standard option.
- ☐ **Powder Coat**  
Our powder coat finish assures a high level of adhesion and durability by following these steps:
  1. Sandblast
  2. Epoxy primer electrostatically applied
  3. Final thick TGIC polyester powder coat
- ☐ **Stainless**  
Stainless Steel: 304 grade stainless steel material finished in either a high polished shine or a satin finish.


**MOUNT OPTIONS**

- ☐ **In-ground**  
In ground mount is embedded into concrete base. Specify in ground mount for this option.
- ☐ **Surface**  
Foot Mount has two 2.5"x6"x.25" feet with two anchors per foot. Specify foot mount for this option.

# HELIX RACK

## Setbacks

---

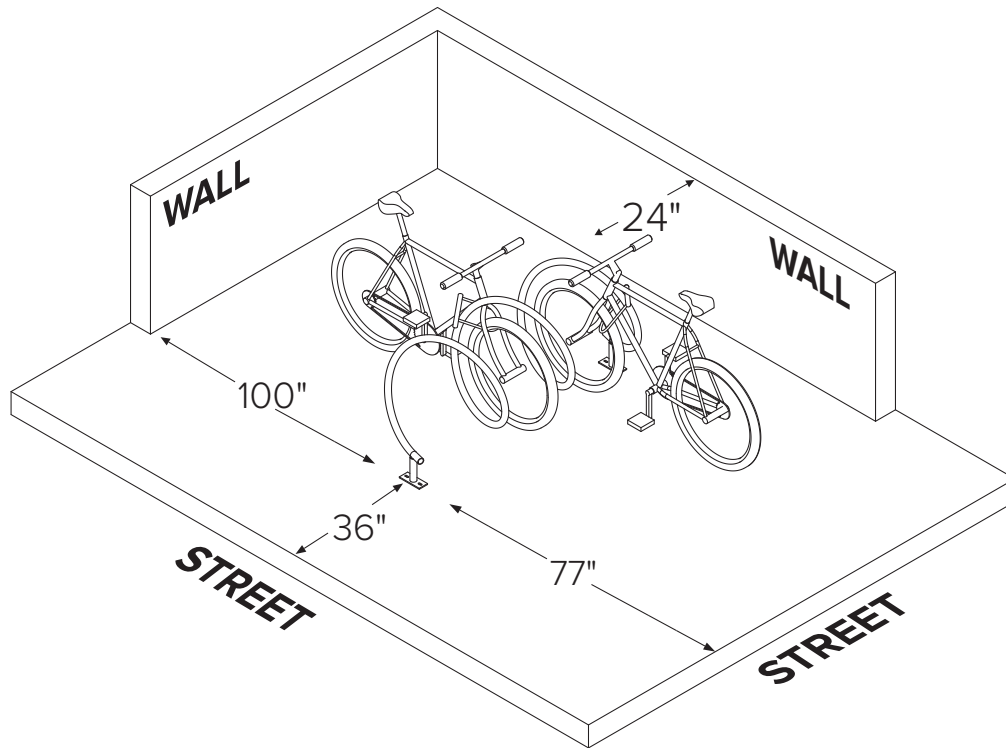

## HELIX RACK

# Installation Instructions – Surface Mount

---

### TOOLS NEEDED


Tape Measure  
Marker or Pencil  
Masonry Drill Bit  
Drill (Hammer drill recommended)  
Hammer  
Wrench 9/16"  
Level

### RECOMMENDED BASE MATERIAL

Solid concrete is the best base material for installation. To ensure the proper anchors are shipped with your rack, ask your Dero Rack representative which anchor is appropriate for your application. Be sure nothing is underneath the base material that could be damaged by drilling.


---

1




Place the rack in the desired location. Use a marker or pencil to outline the holes of the flange onto the base material.

2




Drill 3/8" diameter holes 3" deep into surface. Make sure the holes are at least 3" away from any cracks in the base material.

3



Place rack (and washers to level rack if necessary) over holes.

4



Thread nuts onto anchors, leaving approximately 1/4" of the anchor protruding, and tap into surface. Tighten nuts down to secure rack.

## HELIX RACK

# Installation Instructions – In Ground Mount

### TOOLS NEEDED


Level  
Cement mixing tub  
Shovel  
Trowel

Hole coring machine with 4" bit  
Access to water hose  
Materials to build brace (see "Install Tip" at bottom of page)


### INSTALLING INTO EXISTING SIDEWALK

Core holes no less than 3" diameter (4" recommended) and 10" deep into sidewalk. Fill holes with Por-Rok or epoxy grout. Place rack into holes, making sure the rack is level. 33"-36" of the rack should remain above the surface. If the rack is less than 33" high, it will not support the bike adequately. Make sure the rack is level and held in place until the grout has set.


### INSTALLING INTO A NEW SIDEWALK

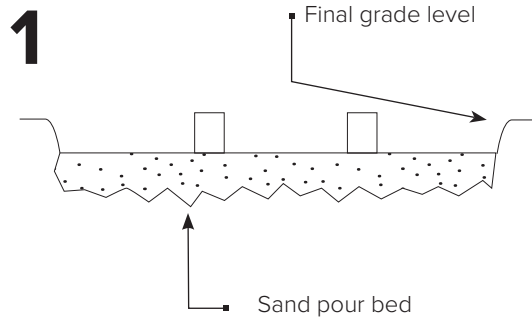

Place corrosion resistant sleeve (min. 3" inside diameter) in sand pour bed in exact location where rack will be installed. Make sure top of sleeve is at same level as desired finished concrete surface. Fill sleeve with sand to keep it in place and prevent it from filling with concrete.

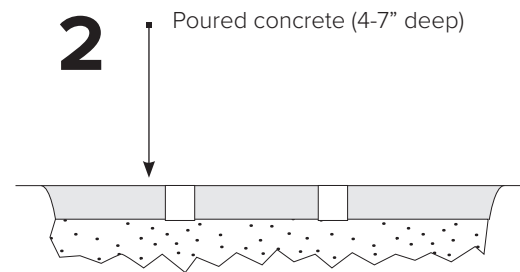

Pour concrete and allow to cure.

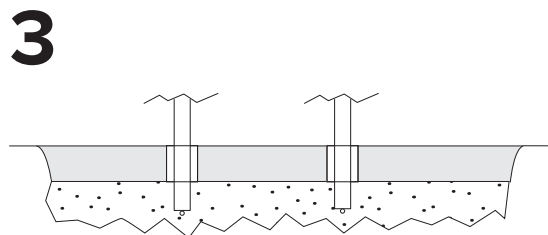

After appropriate cure time, dig out sand from sleeves and insert racks, making sure they are level and at the appropriate height. Pour in Por-Rok or epoxy grout and allow to set.

